
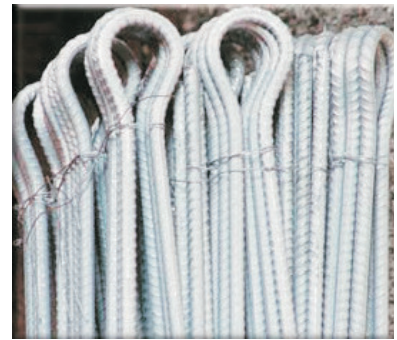


# SHEPHERDS CROOK

## SPECIALLY BENT REINFORCING

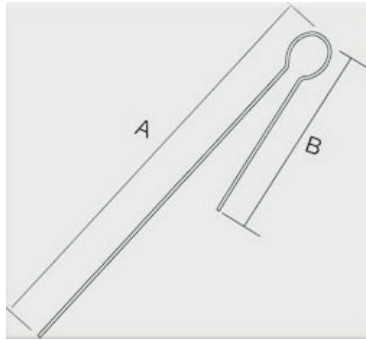

Duraset manufactures Shepherd's crooks/grout rods to client specification in a variety of arm lengths and from steels to meet the specified requirements.

## FEATURES

- Manufactured in smooth or deformed steel, conforming to the requirements of SABS 920 and in accordance with our ISO 9000 quality listing
- Slightly elongated eye to prevent any excess stress during the forming process
- Continuous quality and conformance control
- Standard packaging into bundles of 10 and then bundles of 100 - may differ to suit client requirements
- Variety of arm lengths available - care must be taken to order the correct length

Note: In areas where lacing is not required, a specially kinked bar that provides the necessary support is a cheaper alternative to the Shepherd's crook. Both products are available in 250 MPa, 450 MPa, Pv600 steel.

## SPECIFICATIONS

The terms listed below refer to the 0,2% proof stress (characteristic strength) as per SABS 920.

Stress	Available Sizes (Diameter)	Bar type
250 MPa	12mm 16mm	Smooth Smooth
450 MPa	12mm 16mm	Smooth & deformed Smooth & deformed
Pv600	This term is used to distinguish this special steel from the more conventional SABS 920 steels - the characteristic strength is in excess of 600 MPa.	

**SABS**  
ISO 9001

**HEAD OFFICE**  
670 Power Road,  
Industries West  
Germiston, 1450  
South Africa

Tel +27 (0) 11 876 5040  
Fax +27 (0) 11 873 3532

**SALES OFFICE**  
12 Jurie Street,  
Alrode, Alberton  
1450  
South Africa

Tel +27 (0) 11 617 7000  
Fax +27 (0) 11 864 1442

  
**DURASET**

THE AVENG GROUP

[www.duraset.com](http://www.duraset.com)