


## Multi-strand anchors

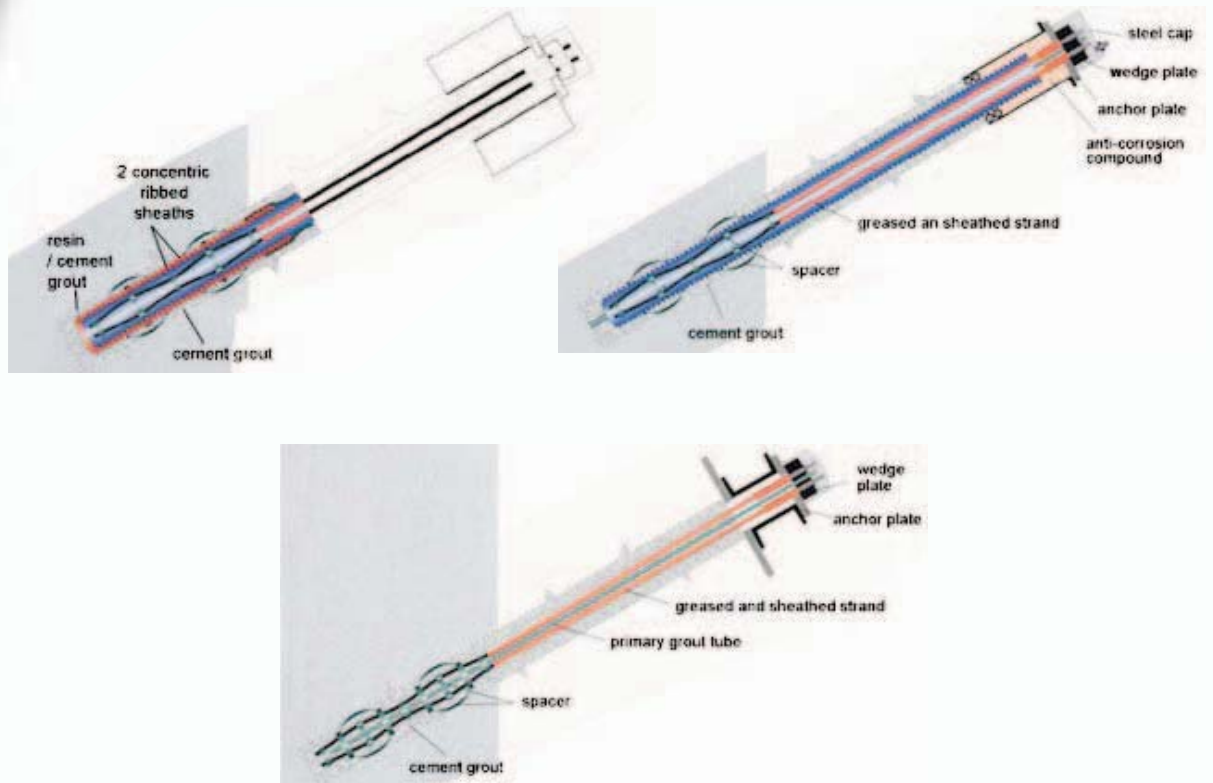

### Description

A number of stranded cables are assembled to form cohesive anchors complying with the engineers requirements (for either temporary or permanent anchoring requirements). This assembly may be fitted with some/all of the following items:

- \* Grout tubes
- \* Breather pipes
- \* Centralisers
- \* Tube-a-manchettes
- \* End caps
- \* Sheathing
- \* Spacers etc.

### Application

- \* Sidewall excavation support
- \* Rehabilitation support
- \* Ground anchors
- \* Soil stabilisation
- \* Tie downs



### Anchor specification

Steel grade (N/mm <sup>2</sup> )	Diameter (mm)	Nom. cross sectional section (mm <sup>2</sup> )	Yield load per strand (kN)	Ultimate load per strand (kN)
1570/1770	12,9	100	157	177
1570/1770	15.24	140	220	248
1570/1770	15.7	150	236	266
1670/1860	12.9	100	167	186
1670/1860	15.24	140	234	260
1670/1860	15.7	150	251	279
1550/1820	15.24	165	255	300



12 Jurie Street • Alrode • Alberton • 1450 • Tel +27 11 617 7000 • Fax +27 11 864 1442  
30 Van Der Bijl Street • Westonaria • 1780 • Tel +27 11 411 4500 • Fax +27 11 411 4509

[www.duraset.com](http://www.duraset.com)

